



Hydra-Clean® Pressure Washers

High Sanitation Cleaning Packages

- Spray down portability for use in industrial and sanitary applications
- Efficient cleaning with water, detergent or chemical solutions
- Supports multiple guns
- Designed to use with cold or hot water up to 200°F (93°C)
- Use with open-head universal drums
- Fits most pressure, flow and material requirements



For more information visit www.graco.com/hydraclean
or call **1-877-844-7226**

CLEAN
up
with Graco

PROVEN QUALITY. LEADING TECHNOLOGY

Technical Specifications

Part Number	Pump Package	Max. Working Pressure	Max. Air Input Pressure	Fluid Flow at 60 cpm	Volume per Cycle	Air Inlet Size	Fluid Inlet Size	Fluid Outlet Size*	Package Instruction Manual
247549	12:1 Cart Mount	1250 psi (86 bar, 8.6 MPa)	100 psi (7 bar, 0.7 MPa)	8.7 gpm (33.0 lpm)	18.6 oz (550 cc)	3/4" npt(f)	1"	3/8"	312585
247550	12:1 Wall Mount	1250 psi (86 bar, 8.6 MPa)	100 psi (7 bar, 0.7 MPa)	8.7 gpm (33.0 lpm)	18.6 oz (550 cc)	3/4" npt(f)	1"	3/8"	312585
247551	23:1 Cart Mount	2275 psi (157 bar, 15.7 MPa)	100 psi (7 bar, 0.7 MPa)	9.2 gpm (34.7 lpm)	19.6 oz (580 cc)	3/4" npt(f)	1"	3/8"	312585
247552	23:1 Wall Mount	2275 psi (157 bar, 15.7 MPa)	100 psi (7 bar, 0.7 MPa)	9.2 gpm (34.7 lpm)	19.6 oz (580 cc)	3/4" npt(f)	1"	3/8"	312585
247553	30:1 Cart Mount	3065 psi (211 bar, 21.1 MPa)	100 psi (7 bar, 0.7 MPa)	6.8 gpm (25.9 lpm)	14.5 oz (430 cc)	3/4" npt(f)	1"	3/8"	312585
247554	30:1 Wall Mount	3065 psi (211 bar, 21.1 MPa)	100 psi (7 bar, 0.7 MPa)	6.8 gpm (25.9 lpm)	14.5 oz (430 cc)	3/4" npt(f)	1"	3/8"	312585
258664	45:1 Cart Mount	4500 psi (310 bar, 31.0 MPa)	100 psi (7 bar, 0.7 MPa)	4.6 gpm (17.4 lpm)	9.8 oz (290 cc)	3/4" npt(f)	1"	3/8"	312585
258665	45:1 Wall Mount	4500 psi (310 bar, 31.0 MPa)	100 psi (7 bar, 0.7 MPa)	4.6 gpm (17.4 lpm)	9.8 oz (290 cc)	3/4" npt(f)	1"	3/8"	312585

Ordering Information

Package Order No.	247549 or 247550	247551 or 247552	247553 or 247554	258664 or 258665
Pump Assembly Part No.	N34DNO	N65DNO	N65DNO	N65DNO
Pump Lower Part No.	247599	241648	687055	24B923
Construction	SST	SST	SST	SST
Standard Seal Repair Kit	247881	222880	See manual 311825	24C162
Construction	UHMWPE/CF-PTFE	UHMWPE/CF-PTFE	UHMWPE/CF-PTFE	UHMWPE/CF-PTFE
Optional Seal Repair Kits	207581	222875	222845	237713
Construction	PTFE	UHMWPE/PTFE	UHMWPE/PTFE	UHMWPE/CF-PTFE
Motor Repair Kit	See manual 311238	See manual 311238	See manual 311238	See manual 311238

Accessories

GUNS AND WANDS

- 247879** Standard brass/SST gun/wand
- 15T283** Standard replacement brass/SST spray gun
- 15T282** Optional replacement SST spray gun
- 15T279** 32 inch SST wand
- 15T280** 10 inch SST wand
- 247880** Gun SST quick disconnect connections
- 247622** Gun and suction tube holder

HOSES

- 214959** 1 in x 6 ft inlet hose
- 247878** 3/8 in x 50 ft outlet hose: 4500 psi


OTHER

- 15T284** 60 mesh inlet strainer with 1" npt(f) connection
- 191635** 10 mesh inlet strainer with 1" npt(f) connection

Stainless Steel Tips

Part No.	Tip No.	Orifice Size	Fan Width Angle at 40 psi (3 bar, 0.03 MPa)	Capacity at 1000 psi (68.9 bar, 6.89 MPa)
805418	40020	0.020 in (0.51 mm)	40°	1.00 gpm (3.78 lpm)
805538	40030	0.030 in (0.76 mm)	40°	1.50 gpm (5.68 lpm)
805542	40035	0.035 in (0.89 mm)	40°	1.75 gpm (6.62 lpm)
805549	25045	0.045 in (1.14 mm)	25°	2.25 gpm (8.52 lpm)
805561	25060	0.060 in (1.52 mm)	25°	3.00 gpm (11.36 lpm)
805562	40060	0.060 in (1.52 mm)	40°	3.00 gpm (11.36 lpm)
805566	40065	0.065 in (1.65 mm)	40°	3.25 gpm (12.30 lpm)
805453	25070	0.070 in (1.78 mm)	25°	3.50 gpm (13.25 lpm)
805458	40075	0.075 in (1.91 mm)	40°	3.75 gpm (14.20 lpm)
805575	00080	0.080 in (2.03 mm)	0°	4.00 gpm (15.14 lpm)
805471	00100	0.100 in (2.54 mm)	0°	5.00 gpm (18.93 lpm)

Other orifice sizes and fan widths available from Graco, contact a sales representative for more information.

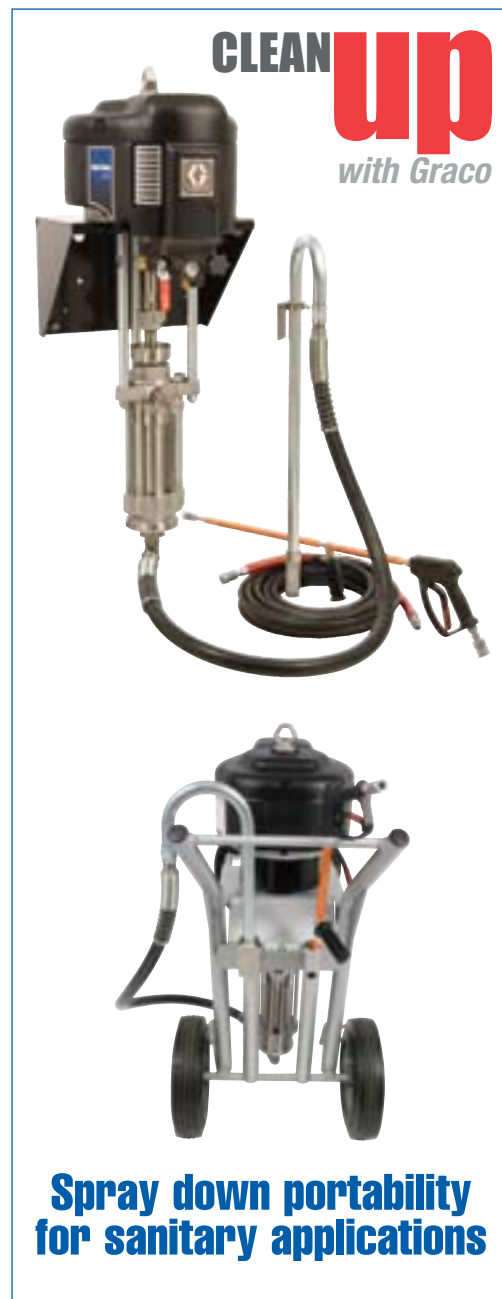

Spray down portability for sanitary applications

For more information visit www.graco.com/hydraclean or call 1-877-844-7226